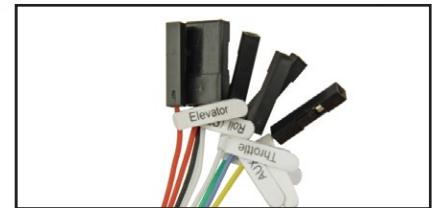


**CROSS FIRE**

## Installing Spektrum® Radio

The wiring loom that exits the Flight Controller uses ID labels for each wire. These are to suit Hitec and Futaba receivers. When using a Spektrum® receiver, these must be connected in the following way:

**Spektrum/JR**

Red/Black/White – Throttle/CH1

Red – Aileron/CH2


White – Elevator/CH3

Green – Rudder/CH4

Blue – Gear/CH5 (normal gyro/self level gyro)

Yellow – Aux 1/CH6 (lost model beeper)

Plug the wires into the respective sockets on your receiver noting that the single-pin connectors should be attached to the 'signal' pin, usually reserved for the orange wire.

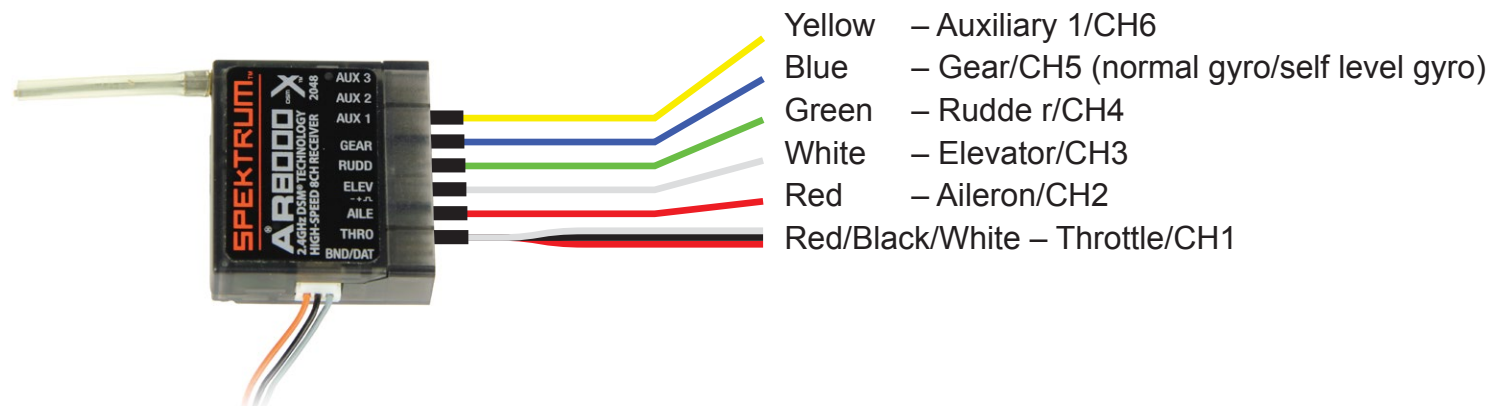

Scan the QR codes



For further information on assembly, set-up, troubleshooting and more, please see the full manual that is available online at: [www.ares-rc.com](http://www.ares-rc.com)



A Quick Start video detailing the installation of Spektrum radio equipment is also available to view on our YouTube channel here: <http://frlnds.co/BhTAlu>

